

GMG

Global Machinery Group, Inc.

2632-ED Electric Drive

COMPACT SLAB SCISSOR LIFT

- ✓ **Maximum Performance**
- ✓ **Superior Components**
- ✓ **Environmentally Better**

STANDARD FEATURES:

- Direct Electric Drive - providing whisper quiet operation and extended duty cycles
- Easily fits through standard doorways
- Drives at full height
- Fully proportional drive and lift
- Amazing 45% gradeability
- Fully adjustable drive, steer, lift / lower speeds
- Automatic 'Smart' battery charger for quick charging
- Multiple disc brakes for smooth stopping
- Extra long slide-out deck with 4 oversized rollers for silky smooth operation
- Folding guardrails
- AC power cable to platform
- Swing out module for easy servicing
- Nitrate coated pins provide long lasting maintenance free service
- 2 year warranty



**EXTREME GRADE
FOR HEAVY CONSTRUCTION USE**

www.goGMG.com

Effective Date: January, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using GMG equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied.

SPECIFICATIONS

MODEL 2632-ED

Measurements	US	Metric
Working height maximum	31.6'	9.63 m
A Platform height maximum	25.6'	8 m
B Platform height - stowed	46"	1.17 m
C Platform length - retracted	88.5"	2.25 m
D - extended	127.5"	3.24 m
Slide-out platform extension deck	39"	1 m
E Platform width - outside	31.5"	.80 m
Toeboard height	6.7"	0.17 m
F Height - stowed rails lowered	90.5" 71"	2.29 m 1.8 m
G Length stowed w/o ladder	96.5" 89"	2.45 m 2.26 m
H Width	31.6"	.8 m
I Wheelbase	73"	1.85 m
J Ground clearance - center - pothole bars deployed	4" .7"	10 cm 2 cm

Productivity


Maximum platform occupancy	2	
Lifting capacity	500 lbs	227 kg
Extension deck capacity	250 lbs	113 kg
Drive height	Full Height	
Drive speed - stowed	2.5 mph	4.02 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed	45%	
Turning radius - inside	0	
Raise speed	28 seconds	
Lower speed	29 seconds	
Controls	Fully Proportional	
Drive	Direct Electric	
Tires - Solid, Non-marking	16" x 5"	40.6 x 12.7 cm

Power

Power source	24v, 225Ah
--------------	------------

Weight

ANSI	4,851 lbs	2,205 kg
CE	4,851 lbs	2,205 kg

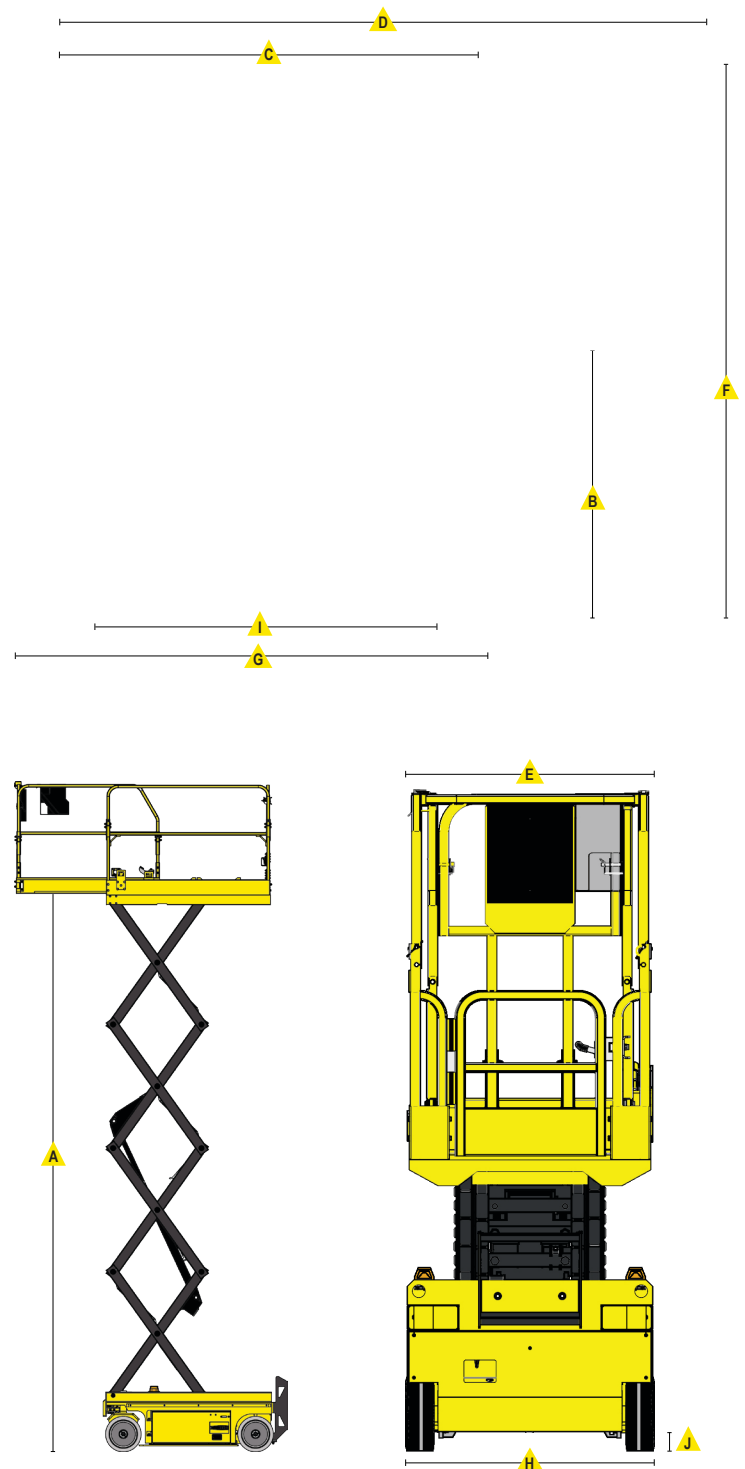

GMG Corporate Office

3428 Bullock Lane
San Luis Obispo, CA 93401
Phone: +1.805.303.2066
Toll Free (USA/Canada): +1.800.301.0499

Distributed By:



www.goGMG.com